

# Look

for **NV™** Hybrid Brackets

The advanced mini-twin bracket with a polymer mesh base.



- Small design combined with a clear base provides exceptional aesthetics. Low-profile mini-twin design for increased patient comfort.
- Essentially nickel-free and biocompatible for sensitive patients.
- Cobalt chromium increases overall bracket strength and helps prevent archwire slot collapse.
- Cobalt chromium is shown to produce lower friction than stainless steel.<sup>1</sup>
- Polymer mesh base allows light to penetrate completely for a full light cure and improved bond strength.
- Unique polymer base retains most of the adhesive at debonding for easier clean-up.

<sup>1</sup>Redlich, M.; Mayer, Y.; Harari, D.; Lewinstein, I. In vitro study of frictional forces during sliding mechanics of "reduced friction" brackets. Am J Ortho Dentod Dentofacial Orthop, July 2003; Vol. 124: p. 69-73.



TP Orthodontics, Inc.  
[www.tportho.com](http://www.tportho.com)

# The NV™ Hybrid Bracket


MBT\* McLaughlin, Bennett, Trevisi System

## PATIENT KITS

Kits contain all metal brackets.

	With Hooks	0.46 mm (.018") Slot	0.56 mm (.022") Slot
Upper & Lower 5-5	Cuspid	<b>285-000</b>	<b>285-003</b>
	Cuspid/Bicuspid	<b>285-001</b>	<b>285-004</b>
	No Hooks	<b>285-002</b>	<b>285-005</b>

Kits contain 20 brackets.  
Maxillary first and second bicuspids have .027" in/out compensation.

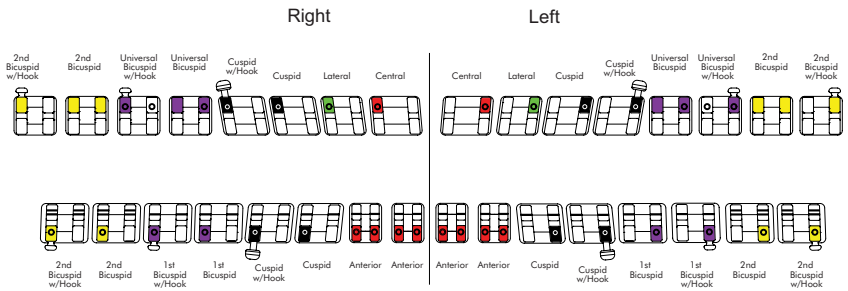

## PACKS OF 5 MAXILLARY BRACKETS

	Slot Size	Left/Right	Bondable
Central	0.46 mm (.018")	L	<b>285-010</b>
Torque +17°		R	<b>285-011</b>
Tip +5°	0.56 mm (.022")	L	<b>285-012</b>
		R	<b>285-013</b>
Lateral	0.46 mm (.018")	L	<b>285-014</b>
Torque +10°		R	<b>285-015</b>
Tip +7°	0.56 mm (.022")	L	<b>285-016</b>
		R	<b>285-017</b>
Cuspid without Hook	0.46 mm (.018")	L	<b>285-018</b>
Torque -7°		R	<b>285-019</b>
Tip +8°	0.56 mm (.022")	L	<b>285-020</b>
		R	<b>285-021</b>
Cuspid with Distal Hook	0.46 mm (.018")	L	<b>285-022</b>
Torque 0°		R	<b>285-023</b>
Tip +7°	0.56 mm (.022")	L	<b>285-024</b>
		R	<b>285-025</b>
Universal Bicuspid without Hook	0.46 mm (.018")	L/R	<b>285-026</b>
Torque -7°			
Tip 0°	0.56 mm (.022")	L/R	<b>285-028</b>
In/Out Comp. .027"			
Universal Bicuspid with Hook	0.46 mm (.018")	L	<b>285-030</b>
Torque -7°		R	<b>285-031</b>
Tip 0°	0.56 mm (.022")	L	<b>285-032</b>
In/Out Comp. .027"		R	<b>285-033</b>
Optional 2nd Bicuspid w/o Hook	0.46 mm (.018")	L/R	<b>285-034</b>
Torque -7°			
Tip 0°	0.56 mm (.022")	L/R	<b>285-035</b>
In/Out Comp. .047"			
Optional 2nd Bicuspid with Hook	0.46 mm (.018")	L	<b>285-036</b>
Torque -7°		R	<b>285-037</b>
Tip 0°	0.56 mm (.022")	L	<b>285-038</b>
In/Out Comp. .047"		R	<b>285-039</b>

## PACKS OF 5 MANDIBULAR BRACKETS

	Slot Size	Left/Right	Bondable
Anteriors	0.46 mm (.018")	L/R	<b>285-054</b>
Torque -6°			
Tip 0°	0.56 mm (.022")	L/R	<b>285-055</b>
Cuspid without Hook	0.46 mm (.018")	L	<b>285-056</b>
Torque -7°		R	<b>285-057</b>
Tip +3°	0.56 mm (.022")	L	<b>285-058</b>
		R	<b>285-059</b>
Cuspid with Distal Hook	0.46 mm (.018")	L	<b>285-060</b>
Torque 0°		R	<b>285-061</b>
Tip +3°	0.56 mm (.022")	L	<b>285-062</b>
		R	<b>285-063</b>
1st Bicuspid without Hook	0.46 mm (.018")	L	<b>285-064</b>
Torque -12°		R	<b>285-065</b>
Tip 2°	0.56 mm (.022")	L	<b>285-066</b>
		R	<b>285-067</b>
1st Bicuspid with Hook	0.46 mm (.018")	L	<b>285-068</b>
Torque -12°		R	<b>285-069</b>
Tip 2°	0.56 mm (.022")	L	<b>285-070</b>
		R	<b>285-071</b>
2nd Bicuspid without Hook	0.46 mm (.018")	L	<b>285-072</b>
Torque -17°		R	<b>285-073</b>
Tip 2°	0.56 mm (.022")	L	<b>285-074</b>
		R	<b>285-075</b>
2nd Bicuspid with Hook	0.46 mm (.018")	L	<b>285-076</b>
Torque -17°		R	<b>285-077</b>
Tip 2°	0.56 mm (.022")	L	<b>285-078</b>
		R	<b>285-079</b>

NV is a trademark of TP Orthodontics, Inc. and manufactured under US Pat # 6,685,468. All other patents pending.

\*MBT is a registered trademark of 3M Unitek. The TP Orthodontics version of the McLaughlin, Bennett and Trevisi prescription is not intended to be a duplication of, nor an endorsement by, these doctors and such endorsement is not implied by the use of this term.

To order, visit [www.tportho.com](http://www.tportho.com) or call your Customer Service Representative.

United States: 800-348-8856

Australia: 1 800 643 055

South Africa: +27 (0)12 663 98 99

United Kingdom: 44 (0) 113 2539192